# Economical Large Digit Display LD4-LN 50 point lineariser

4 x 57mm high LED digits



### **Features**

- 50 point lineariser with EEPROM storage of lineariser table values
- 57mm high digits (visible to 25m)
- High brightness LED display
- Displays in engineering units
- Pushbutton calibration and setup
- 18VDC unregulated transmitter supply (AC supply models)
- 240VAC, 110VAC, 12 to 16VAC powered or DC (15 to 24V non isolated) powered or optional isolated DC (12 to 24 or 28 to 48VDC) factory configured
- Digital filter, improves stability
- Two alarm/control relay outputs (5A)
- 2 year guarantee
- Rugged, weatherproof, IP65 rated, housings.
- Remote input to perform special functions e.g. zero, tare, display toggle, brightness level switching, high/low memory, peak hold, display hold, setpoint only access or security lockout
- Optional serial communications, analog retransmission, extra relays, panel mounting kit and hood removal.

# Description

Model LD4-LN is a high visibility large digit lineariser display for up to 50 linearising points (X and Y values). The LD4-LN will accept inputs of  $\pm 20$ mA, 4-20mA,  $\pm 100$ mV,  $\pm 1V$ ,  $\pm 10$ V or  $\pm 100$ V (user selectable via links). From these inputs the display can be scaled to read in engineering units e.g. "Litres", "mm" etc. The instruments feature flexible pushbutton scaling and programming.

An 16VDC unregulated transmitter supply is provided as standard on AC supply models. Each instrument is supplied with a two control/alarm setpoint relays. Optional outputs include isolated analog retransmission (4-20mA, 0-1V or 0-10V, selectable) or isolated serial retransmission (RS232 or RS485 with choice of ASCII or Modbus RTU protocols, factory configured). An isolated 24VDC ( $\pm 12V$ ) transmitter supply output is also optionally available.

An external input is configurable to perform one of various functions e.g. zero, tare, display toggle (from live to linearised display), brightness level switching, high/low memory, peak hold, display hold, setpoint only access or security lockout. This input can also be used to allow fast and easy access to the alarm setpoints.

The 57mm LED display is housed in a rugged, IP65 rated, UV stabilised ASA enclosure.



LD4LN-2.3-0

Telephone: +61 2 9476 2244

Facsimile: +61 2 9476 2902

e-mail: sales@aicpl.com.au

Internet: www.aicpl.com.au

# **Technical Specifications**

# Weight and Dimensions

Input Types:  $\pm 20$ mA, 4-20mA,  $\pm 100$ mV,  $\pm 1$ V,

 $\pm 10$ V or  $\pm 100$ VDC, link

selectable

Linearising: Up to 50 points, X and Y values

Accuracy: 0.1% of full scale when

calibrated

Input impedance:  $80\Omega$  nominal (4-20mA or

 $\pm 20$ mA input) 1M $\Omega$  (DC Volts

input)

Sample rate: 4 per second ADC resolution: 1 in 20,000

Microprocessor: MC68HC11 CMOS

Ambient Temp: -10°C to 60°C

Humidity: 5% to 95% non condensing

Outputs: 2 x setpoint relays, form A, rated

5A at 240VAC (resistive load)

Transmitter supply: 18VDC unregulated 20mA max.

Available on AC powered

models only

Power Supply: See order code table (type is

factory configured)

Power consumption: AC supply, 15VA max.


DC supply, depends on supply voltage, typically 500mA (2Apeak) for 24V using non isolated power supply

## **Order Codes**


| Order Code     | Display          | Supply Voltage           |
|----------------|------------------|--------------------------|
| LD4-LN-240-574 | 4 x 57mm red LED | 240VAC                   |
| LD4-LN-110-574 | 4 x 57mm red LED | 110VAC                   |
| LD4-LN-DCN-574 | 4 x 57mm red LED | 15-24VDC<br>non isolated |
| LD4-LN-DC-574  | 4 x 57mm red LED | 12-48VDC isolated        |

# **Options**

| Option Code     | Description   |  |
|-----------------|---|--|
| LD4-OPT-12      | 24VDC transmitter supply ( $\pm 12$ VDC)                                  |  |
| LD4-OPT-C2      | RS232 serial comms, non-isolated  |  |
| LD4-OPT-C4      | RS485 serial comms, non-isolated  |  |
| LD4-OPT-A       | Isolated analog retransmission<br>4-20mA, 0-1VDC or 0-10VDC<br>selectable |  |
| LD4-OPT-RR      | 2 extra setpoint relays   |  |
| LD-MTG-PM-KIT   | Panel mount kit incl brackets & screws                                    |  |
| LD-HOOD-REMOVAL | Front hood removal  |  |

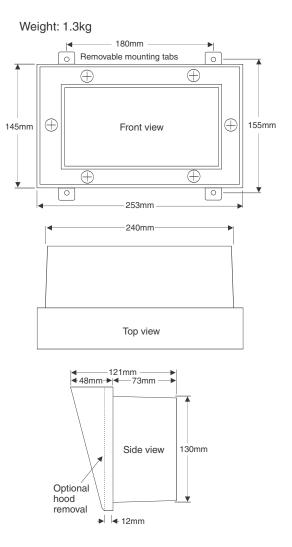


# **Panel Mounting Options**

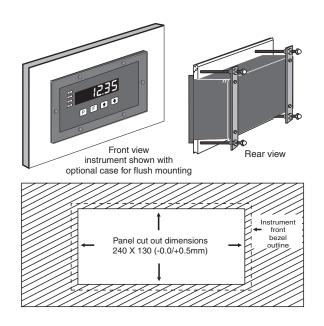

LD4LN-2.3-0

# Displays available in Large Digit Series

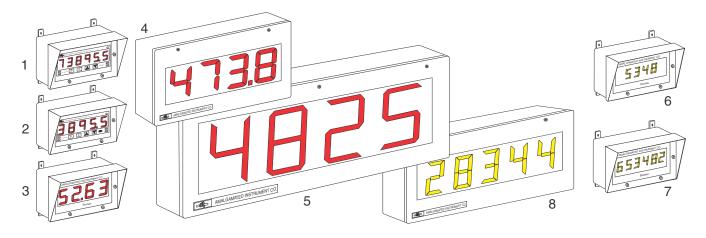

| No. | LED digit size | No of digits | No.   | "FLIP" digit size      | No of digits |
|-----|----------------|--------------|---|------------------------|--------------|
| 1   | 38mm           | 6            | 6   | 39mm - selected models | 4            |
| 2   | 45mm           | 5            | 7   | 39mm - selected models | 6            |
| 3   | 57mm or 58mm   | 4            | 8   | 100mm                  | 4, 5 and 6   |
| 4   | 100mm          | 4 and 6      | 38, 58, 100 and 200mm LED displays          |                        |              |
| 5   | 200mm          | 4            | are available in red, green, amber or white |                        |              |

# Applications/input types available with large digit display models

- Analog input, process transmitters etc.  $\pm 20$ mA, 4-20mA or  $\pm 2.5$ VDC or  $\pm 25$ VDC
- Pulse input, rate, total, count, grand total (encoders, switches, proximity sensors etc.)
- Temperature RTD, thermocouple, 4-20mA
- Weighing 4 or 6 wire mV/V output loadcells
- Pressure measurement 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Liquid level measurement 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Serial input RS232, RS485, Serial current loop for slave displays etc.
- Synchronous Serial Interface (SSI) for high accuracy position etc. measurement
- Binary, BCD or Gray Code input
- Real Time clock with alarms
- Multifunction timer elapsed time, stopwatch, run time etc.

LD4LN-2.3-0

Telephone: +61 2 9476 2244 Facsimile: +61 2 9476 2902 e-mail: sales@aicpl.com.au Internet: www.aicpl.com.au