The Intelligent PM6-RT

Temperature Indicator Panel Meter - RTD input



Features

- Input from 2 or 3 wire Pt100 or Pt1000 RTD temperature sensor
- 4 digit high brightness LED display
- Large 20mm high digits Viewing distance up to 10m
- Programmable/switchable display brightness, helps to reduce glare in low light environments
 Ideal for automotive or marine "in cab" applications
- Visual indication of high or low setpoint
 display can be set to flash value
- Can be scaled without the need for test equipment or special tools
- Pushbutton setup of scaling & functions
- Calibration and set up data stored in EEPROM
- Programmable decimal point
- Programmable digital filter, improves stability
- Leading zero blanking
- Choice of power supplies 240 VAC, 110VAC, 24VAC or isolated 12 to 48V DC (factory configured)
- DIN size 96mm x 48mm bezel
- Microprocessor based design
- Computer tested and pre-calibrated
- Rugged aluminium enclosure
- 2 year guarantee
- Remote input to perform special functions e.g. maximum, minimum, peak hold, display hold or display brightness



Description

The PM6 panel mount display features easy to use set up programming functions. Changes to the settings are made using three pushbuttons located at the rear of the instrument.

The PM6-RT accepts an input from a 2-wire or 3-wire Pt100 or Pt1000 RTD temperature sensor.

The large high brightness 20mm red LED display provides excellent visibility, even in brightly lit areas. A special feature of the PM6-RT is the programmable display brightness, which allows the display intensity to be reduced to conserve power or to reduce glare in darker areas. The display brightness can also be switched to the preset level by a remote input. This enhances the flexibility of the indicator in differing ambient light conditions

A very useful feature of the PM6-RT is the ability to set a visual alarm for a high temperature, a low temperature or both. Once the "alarm" values are reached, the display will flash to highlight the situation. The display can be set to either flash the temperature or to flash the "overrange" indication (-ar-)

The PM6 is packaged in a rugged industrial $^1/_8$ DIN panel mount enclosure, with a behind panel depth of only 115mm.

PM6RT-1.5-0

Telephone: +61 2 9476 2244

Facsimile: +61 2 9476 2902

Internet: www.aicpl.com.au

Technical Specifications

Input Pt100 or Pt1000 RTD temperature

sensor (2-wire or 3-wire)

(user selectable)

ADC resolution: 15 bit plus sign

Decimal points: 0, 1, 2 or 3 decimal point places

(selectable)

Accuracy: 0.1% of full scale when calibrated

 ± 50 ppm/°C ± 1 digit

Sample rate: 2 samples per second Display update: 2 times per second Ambient temp: -10°C to 50°C

Humidity: 5 to 95% non condensing
Display: 4 digit 20mm LED
Power supply: AC 240V, 110V or 24V or

DC isolated 12 to 48VDC Note: Factory configured

Power usage: AC supply 2VA

DC supply typically 35mA at 24VDC

or 70mA at 12VDC

Physical Characteristics

Bezel size: DIN 48mm x 96mm x 9mm

Case size: 44mm x 91mm x 115mm behind face

of panel

Panel cut out: 45mm x 92mm (+1mm & - 0mm)


Connections: Plug in screw terminals

(max 2.5mm² wire)


Weight: 400g (AC supply model) or

300g (DC supply model) unpacked

PM6-RT electrical connections

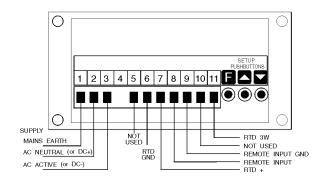

PM6-RT panel mounting details

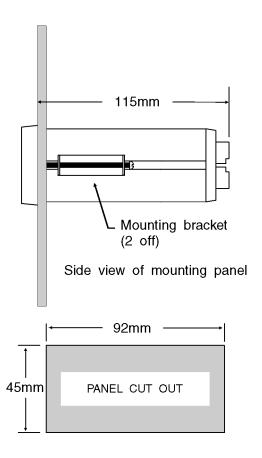

Order Code:

PM6-RT-240-4E 240VAC supply PM6-RT-110-4E 110VAC supply PM6-RT-24-4E 24VAC supply PM6-RT-DC-4E 12-48VDC supply